

# MAXDoor Model UL-XL

## Vertical Lift Fabric Doors for Large Door Openings

### CAGE CODE 8AUG0



#### Size :

- Large Door Openings

#### Speed:

- 6-8 inches per second
- Other Speeds are available

#### Strength:

- Horizontal Beams spaced for high Wind-load
- Dual Layer Fabric-Air-Fabric door panel
- Aluminum rectangle tube beams
- Structural Steel Head Member
- Structural Steel Side Frames
- Structural Steel Door Guides
- 22-oz. Heavy-duty PVC Fabric
- Shaft Mounted Gear-Motor
- Multiple Lifting Belts
- Beam Size UHMW Guide Blocks

#### Safety:

- Increased protection with multiple lifting belts
- Parallel Shaft Mounted Gear-Motor
- Two Motor System
- 2-piece Door Guides are free of any Lifting Belts or Devices
- Wireless Reversing Edge
- Emitter - Receiver Photo-eyes
- Auxiliary Hoist Brake System
- Maintenance Safety Switch
- Lockable Disconnect on Control Panel
- PLC Monitored circuits
- Over Travel Protection
- Door Position Switches

#### Simple:

- Excellent Environment separation by one piece, dual layer fabric curtain
- Fabric over-laps interior and exterior door guide surfaces for excellent Weather seal
- Two piece door guides are easy to maintain
- No Springs or Counter Weights
- Designed for 20-years Service Life

- MAXDOORS are designed for the toughest environments
- Simple design ensures minimum Operation & Maintenance costs
- Head Member and Side Frame/Guides utilize structural steel components which provide superior overall strength
- Horizontal beams manufactured provide the highest wind-load
- Fabric choices include a variety of materials for special environments including high temperature, cut proof and anti-static
- MAXDOOR Model UL-XL are custom built for very Large Door Openings

# MAXDoor Model UL-XL


## Vertical Lift Fabric Doors for Large Door Openings CAGE CODE 8AUG0

### Fabric Colors:

- Blue      Green      White
- Tan      Black      Red
- Grey      Yellow      Translucent

### Options:


- Anti-Collision Door Protection System
- Severe Duty Motor
- Head Member Mounted Controls
- Wireless Reversing Edge
- Door Activation Sensors
- Aluminum Guide Rails
- Windows/Screens
- Insulated Fabric
- Sound Reduction Fabric
- Heat Resistant Fabric
- Low temperature Fabric
- Impact Resistant or Flexible Guide Rails
- Heated Head-Member
- Brush Weather Seals
- Long Distance Radio Controls

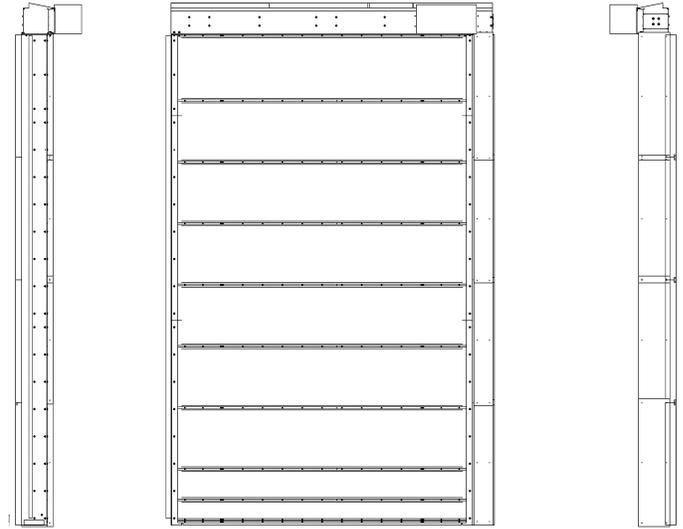

### Space Requirements:

- Left & Right Side Room: 10 inches each
- Left & Right Guide Projection: 15 inches
- Head Member Height: 16 inches
- Head Member Projection: 18 inches
- All door sizes are manufactured for clear opening height and width. No obstructions in the door opening.

Contact us for your exact door size space requirements

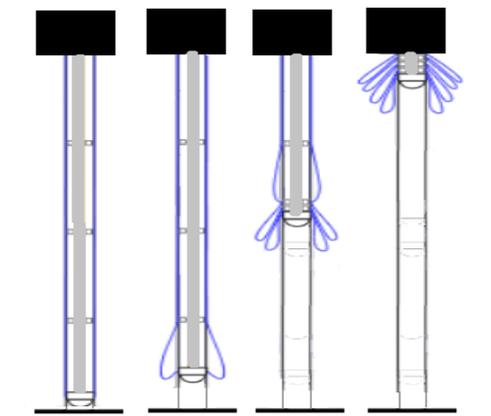

1020 W. 14 Mile Road  
Clawson, Michigan 48017

Phone (248) 915 5838

Www.maxdoor-usa.com

Fax (866) 285 5139

sales@maxdoor-usa.com