

MAXDOOR Model HD

Heavy Duty Vertical Lifting Fabric Door



MINING TRUCK SHOP MAXDOOR HD with White High Visibility Fabric

Size up to :

- 60' wide x 70' high
- Larger door openings require HD-XL or UL-XL
- Interior or Exterior Mounted
- Between Jamb and Under Lintel Installation

Speed:

- 6-10 inches per second
- Other speeds are available

Strength:

- Self-supporting, Low-profile C-15 channel head member
- Self-supporting structural steel side frames
- Structural steel door guides (Aluminum guides are available)
- High Wind-load capacity
- Heavy-duty horizontal beams: 6061-T6 Aluminum
- Industrial duty, direct drive, gear-motor with brake
- 22-oz. Heavy Duty PVC Fabric
- Raised Bottom Beam for Ice and Mud Build up
- Larger Bottom Rubber Weather Seal
- Easy to clean out open Door Guides

Safety:

- Parallel Shaft Mounted Gear-motor
- Multiple Lifting Belts
- Optional Auxiliary Main Shaft Brake
- Manual Brake Release
- 2-piece Door Guides are free of any Belts or Devices
- Over Travel Limit Switch
- Wireless Reversing Edge
- Transmitter Receiver Photo-eyes
- Extreme Duty Gear Motor
- Head Member Auxiliary Heat System (Option)
- Control Panel with Lockable Fused Disconnect

MAXDOOR

1020 W. 14-Mile Road

Clawson, Michigan 48017

Phone (248) 915 5838

Fax (866) 285 5139

Www.maxdoor-usa.com

sales@maxdoor-usa.com

MAXDOOR Model HD

Heavy Duty Vertical Lifting Fabric Door

Fabric Colors:

- Blue Green White
- Tan Black Red
- Grey Yellow Translucent


Options:

- Anti-Collision Door Protection System
- Severe Duty Motor
- Automatic Door Systems
- Operator Mounted Controls
- Wireless Reversing Edge
- Door Activation Sensors
- Aluminum Guide Rails
- Alternate Fabrics for Sound, Heat Cold, Security, Vision, Insulation
- Insect/Bird Screen Fabric
- Heated Head-member
- Brush Weather-seals
- Industrial Long Distance Radio Controls
- Weight Counter-balance System
- Faster Open and Close Speed
- Control Panels with HMI

Space Requirements:

- Left & Right Side Room: 9.5 inches (241mm) each
- Left & Right Guide Projection: 16 inches (419mm)
- Head Member Height: 16.5 inches (406mm)
- Head Member Projection: 19 inches (482mm)
- MAXDoors are manufactured for a clear opening height and width. No fabric or obstructions within the door opening. Example: the total fabric and beam stack height for a 40' high (14,960mm) MAXDOOR HD is 8' 10" (2692mm). Shorter doors require less stack height.

Contact us for your exact door size space requirements

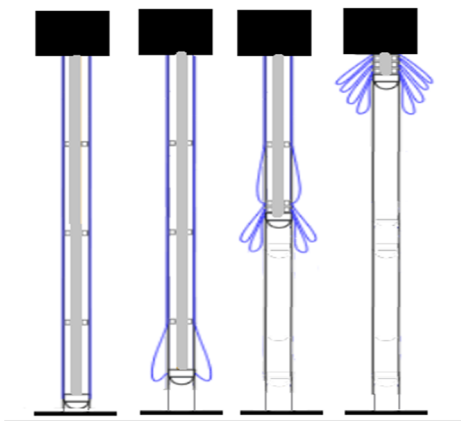

1020 W. 14-Mile Road

Clawson, Michigan 48017

Phone 248 915 5838

Fax 866 285 5139

Www.maxdoor-usa.com

sales@maxdoor-usa.com