

MAXDoor Model UL

MADE IN THE
USA

Vertical Lift Fabric Doors



- MAXDoors are designed for the toughest environments
- Simple design ensures minimum Operation & Maintenance costs
- Head Member and Side Frame/Guides utilize structural steel components which provide superior overall strength
- Horizontal beams manufactured provide the highest wind-load
- Fabric choices include a variety of materials for special environments including high temperature, cut proof and anti-static
- MAXDoor are custom built for each application
- MAXDoor offer a variety of Control Panel types and options

Size:

- For Small, Medium, Large and Extra Large Door Openings

Speed:

- 8-12 inches per second

Strength:

- Structural Steel Head Member
- Structural Steel Side Frames
- Aluminum or Steel Door Guides
- Twist and Bow Resistant Rectangle Tube Horizontal Beams
- High Wind Resistance
- Fabric-Air Space-Fabric door panel
- 22-Oz. Heavy-duty PVC Fabric
- UHMW Guide Blocks
- Direct Drive Motor with Brake

Safety:

- Minimum 4 Lifting Belts
- Maintenance Safety Switch
- Photo-eyes for monitoring opening
- Wireless Reversing Edge
- Parallel Shaft Mounted Gear-motor
- 2-piece Door Guides are free of any Lifting Belts or Devices
- Manual Brake Release at Motor
- Manual Motor Operation (Power Loss)
- Lockable Disconnect on Control Panel
- Motor Overloads and Circuit Fusing
- PLC Monitored Circuits
- Over Travel Protection
- Door Position Switches
- Main Shaft Auxiliary Brake System

Simple:

- Excellent Environment separation by one piece, dual layer fabric curtain
- Fabric over-laps interior and exterior door guide surfaces for excellent Weather seal
- Two piece door guides are easy to maintain
- Designed for 1M Cycles or 20-year Service Life




Vertical Lift Fabric Doors

Fabric Colors:

- Blue Green White
- Tan Black Red
- Grey Yellow Translucent

Options:


- Severe Duty Motor
- Head Member Mounted Controls
- Reversing Edge with Cable Reel
- Door Activation Sensors
- Aluminum Guide Rails
- Custom Fabrics
- Heated Head-member
- Brush Weather seals
- Industrial Long Distance Radio Controls

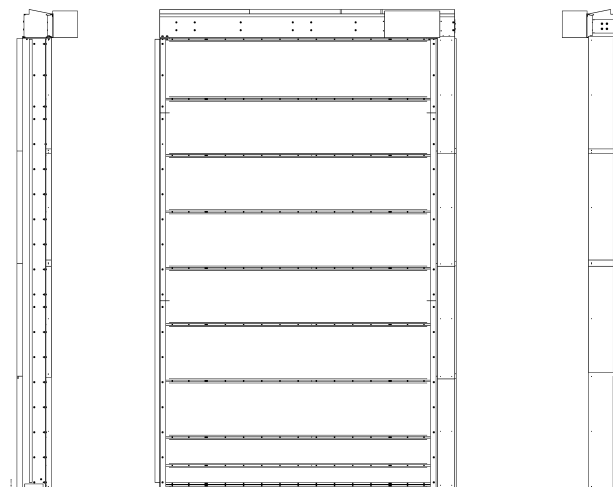

Space Requirements: Face of Wall Mount

- Left & Right Side Room: 10 inches each
- Left & Right Guide Projection: 15 inches
- Head Member Height: 18 inches
- Head Member Projection: 20 inches
- All door sizes are manufactured for clear opening height and width. No obstructions in the door opening.
- Between Jamb and Under Lintel Mount is available

Contact us for your exact door size space requirements

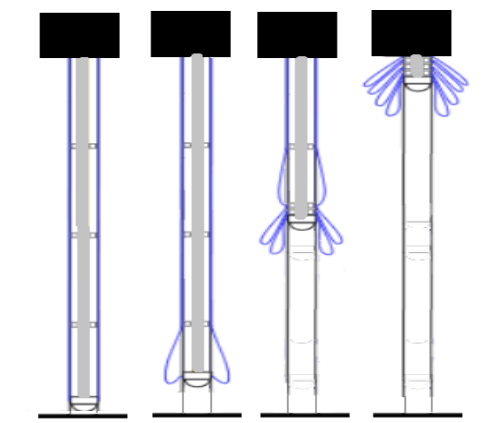

USA

MADE IN THE

1020 W. 14 Mile Road
Clawson, Michigan 48017

Phone (248) 915 5838

Www.maxdoor-usa.com

Fax 866 285 5139

sales@maxdoor-usa.com