

MAXDoor Model UL-XL

MADE IN THE
USA

Vertical Lift Fabric Doors for Large Door Openings



Size :

- Extra Large Tall or Wide Door Openings

Speed:

- 6-12 inches per second

Strength:

- Twist Resistant, Rectangle 6061-T6 Aluminum Horizontal Beams
- Designed for High Wind Resistance
- Dual Layer Fabric-Air-Fabric door panel
- Structural Steel Head Member
- Structural Steel Side Frames
- Aluminum Door Guides
- 22-oz. Heavy-duty PVC Fabric
- Direct Drive Gear-Motor
- Multiple Lifting Belts
- Bottom Beam Lock Down Device

Safety:

- Multiple Lifting Belts
- Direct Drive Gear-Motors
- Multiple Motor System
- Lifting Belts attached to bottom beam
- Door Guides are free from all locking devices
- 2 Piece Removable Door Guides
- Reversing Edge
- Emitter - Receiver Photo-eyes
- Direct Drive Gearmotors w/ Brake
- Maintenance Safety Switch
- Lockable Disconnect on Control Panel
- PLC Monitored circuits
- Over Travel Protection
- Adjustable Open / Close Position Switch

Simple:

- MAXDOORS are designed for the toughest environments
- Simple design ensures minimum Operation & Maintenance costs
- Head Member and Side Frame utilize structural steel components which provide superior overall strength
- Aluminum Rectangle Tube Horizontal beams provide the highest wind-load
- Curtain Fabric choices include a variety of materials for special environments including high temperature, cut proof and RF
- MAXDOOR Model UL-XL are custom built for very Large Door Openings
- Excellent Environment separation by one piece, dual layer fabric curtain
- Fabric over-laps interior and exterior door guide surfaces for excellent Weather seal
- Two piece door guides are easy to maintain
- Manufactured using common size and locally available material
- NEMA-4 PLC Control Panel with Contactors
- Easy to repair Curtain Material

MAXDoor Model UL-XL


Vertical Lift Fabric Doors for Large Door Openings CAGE CODE 8AUG0

Fabric Colors:

- Blue Green White
- Tan Black Red
- Grey Yellow Custom

Options:


- Severe Duty Motor
- Head Member Mounted Controls
- Wireless Reversing Edge
- Door Activation Sensors
- Heat Resistant Fabric
- Low temperature Fabric
- Heated Head-Member
- RF Attenuation Fabric

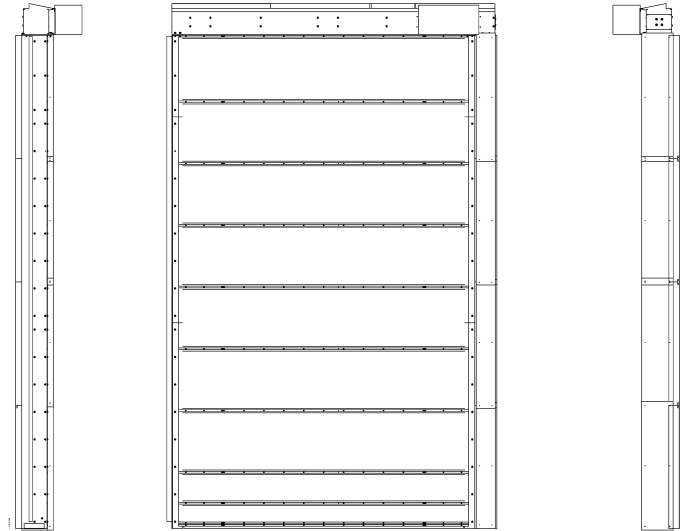

Space Requirements:

- Left & Right Side Room: 4 -10 inches each
- Left & Right Guide Projection: 15 inches
- Head Member Height: 16 inches
- Head Member Projection: 18 inches
- All door sizes are manufactured for clear opening height and width. No obstructions in the door opening.

Contact us for your exact door size space requirements

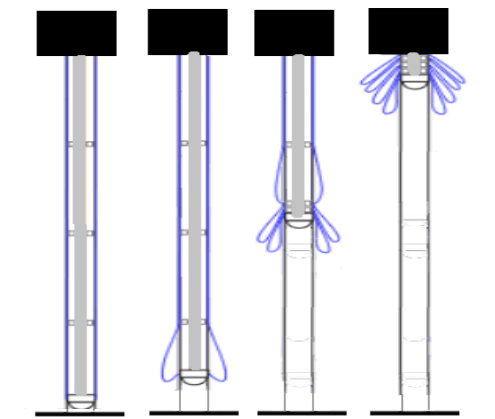

USA

MADE IN THE

1020 W. 14 Mile Road

Clawson, Michigan 48017

Phone (248) 915 5838

Www.maxdoor-usa.com E-Mail: sales@maxdoor-usa.com